




Tiger Shark 11500

Models	Tiger Shark 11,500 Tiger Shark 11,500 SR (Synthetic)
Part Number	TS11500-12V / TS11500SR-12V (Synthetic)
Rated Line Pull	11,500 lbs (5,216 kg)
Motor	Sealed 6.0 HP Series Wound
Gearing	3-Stage Planetary
Gear Ratio	218:1
Solenoid	Weather Sealed Solenoid and Circuit Breaker Protected
Clutch	Pull and Turn, Ergo
Brake	Mechanical, Automatic Load Holding
Rope	Wire 9.5mm x 26m Synthetic 25m x 9,5mm Dyneema
Hook	Heavy Duty Clevis Pinned Latched
Fairlead	Heavy-Duty, Stainless Steel 4-Way Roller CNC'd Billet Aluminum Hawse
Remote	12' Rubber Sealed Hand-held
Dimensions	529mm L x 160mm W x 234.5mm H
Drum Diameter	64mm
Drum Length	228.6mm
Installed Weight	42 kg 28.6 kg
Shipping Weight	44 kg 30.4 kg
Warranty	Limited 2 Year Warranty
Line PULL: 0 lbs (0 kgs)	80 Amps Motor Draw/19 FPM (5.7 MPM) Line Speed
Line Pull: 11,500 lbs (5,216 kgs)	410 Amps Motor Draw/2 FPM (0.6 M/M) Line Speed
Lead Wires	1.8m x 4 gauge 25mm

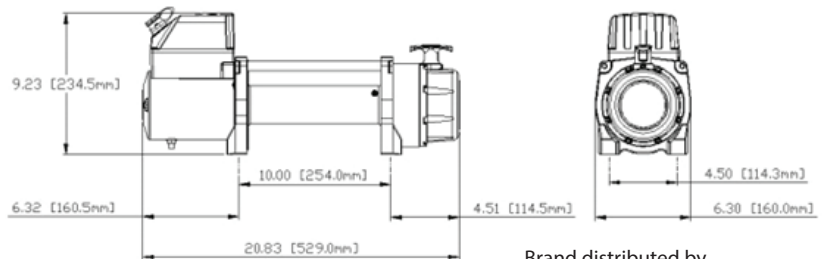

Brand distributed by



BLACK DIAMOND VEHICLE COMPONENTS
www.bdcomponents.co.za