




# Tiger Shark 9500

Models	Tiger Shark 9,500   Tiger Shark 9,500 SR (Synthetic)
Part Number	TS9500-12V / TS9500SR-12V (Synthetic)
Rated Line Pull	9,500 lbs (4309 kg)
Motor	Sealed 5.2 HP Series Wound
Gearing	3-Stage Planetary
Gear Ratio	218:1
Solenoid	Weather Sealed Solenoid and Circuit Breaker Protected
Clutch	Pull and Turn, Ergo
Brake	Mechanical, Automatic Load Holding
Rope	Wire 8.3mm x 29m  Synthetic 9,5mm x 25m
Hook	Heavy Duty Clevis Pinned Latched
Fairlead	Heavy-Duty, Stainless Steel 4-Way Roller   Anodized Aluminum Hawse
Remote	12' Rubber Sealed Hand-held
Dimensions	529mm L x 160mm W x 234.5mm H
Drum Diameter	63.5mm
Drum Length	228.6mm
Installed Weight	41kg   26.7kg
Shipping Weight	42kg   28.6 kg
Warranty	Limited 2 Year Warranty
Line Pull: 0 lbs (0 kgs)	80 Amps Motor Draw/19 FPM (5.7 MPM) Line Speed
Line Pull: 9,500 lbs (4,309 kgs)	340 Amps Motor Draw/4 FPM (1.2 M/M) Line Speed
Lead Wires	1.8m x 4 gauge 25mm <sup>2</sup>

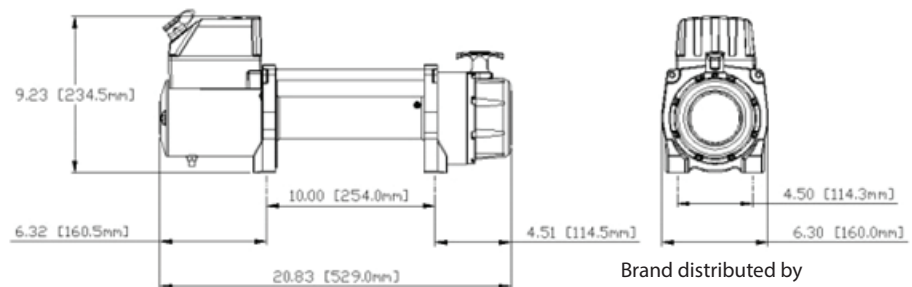

Brand distributed by



BLACK DIAMOND VEHICLE COMPONENTS  
www.bdcomponents.co.za